



Mini-DisplayPort to DVI Adapter

Mini-DisplayPort Male to DVI-I Dual-Link Female

Easily connects a mini-DisplayPort source with HDMI cable.

MANHATTAN° Mini-DisplayPort Adapters help establish a fast and convenient connection between a media source equipped with a mini-DisplayPort and a DVI display cable. Ideal for presentations, retail displays and other uses, this single-cable solution keeps installations and workplaces neat and organized without an external power supply or complicated configuration. Nickel-plated contacts and full shielding help MANHATTAN Mini-DisplayPort Adapters provide clear and stable video transmissions in home and office multimedia applications. Durable white PVC jackets and molded boots with strain relief complement Macintosh systems and help ensure connections remain uninterrupted and steady.


Model

Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.



Technical Drawing

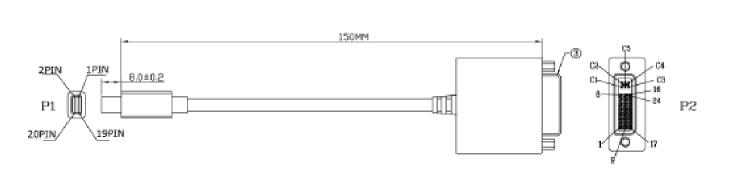

ELECTRICAL TEST:

1.100% OPEN SHORT SHORT & MIS WIRE TEST 2.CONTACT RESISTANCE:1 OHM(MAX)

3.INSULATION RESISTANCE: 10M OHM(MIN)

4.HI-POT TEST:DC 300V/10ms

MINI_DP	PCB(IE fti)	MINI DP	PCB(瓜面)
3 - 5 - 7 - 15 - 17 - 8 - 4 - 16 - 18 - 19 - Shell 5	RED 3 SHEEL 3 SHEEL 3 SHEEL 5 SHEEL 17 SHEEL 17 SHEEL 18 SHEEL 19 SHEEL 1	20 — 2 — 14 — 6 — 12 — 13 — 11 — 9 — 1	CREEN 20 YELLOW 2 DRAIN 14 PURISE 6 WHITE 12 DRAIN 13 WHITE 11 BROWN 9 DRAIN 1 Shell

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED			BEV. DESCRIPTION						DATE		
OR USED IN ANY MANNER WITHOU CONSENT OF MANHATTAN.			THE PRIOR V	WRITTEN	• ⇔	TOLERANCE INCHES PVM				NHATT	
6	MINE DISPLAY PORT M ABS BOTTOM SHELL		1	pes	.X	.015	.30	= >-		MMALL	AN
5	5 MINI DISPLAY PORT M ABS TOP SHELL		1	pos	.000	.010	.10	TITLE:			
4	DVI_24+5 Feale+PCB+SMT_InsulationsBlack,Shell NICXEL,WITH NUT		1	pos	,3000	.005	.05	mini DP TO DVI CABLE M)-15CM
3	3 MINI DISPLAY PORT N NICKEL PLATED		1	pes	DRAWN BY	Cal		CUSTOMER:		1CA 322485	
2	2 20PIN PCB BOARD		1	pos	CHECK BY			SCALE	MONE		REV.
1	1 UL30276(32AWG*1PR+6AV)*5 +33AWG*5C+AEB(AL85%) OD:4,8MM WHITE JACKET		L.	М	CHECK BI		UNET	MM	DRAWTING NO.:	A.	
NC	NO DESCRIPTION		QTY	UNIT	APPD BY			DATE	05.05/09		1/1

Features

- Connects a mini-DisplayPort source with a DVI-I display cable
- Delivers a single, high-quality signal to DVI display ideal for Mac
- Fully shielded to reduce EMI and other interference sources
- Molded PVC boot and strain relief
- Lifetime Warranty

Specifications

STANDARDS/CERTIFICATIONS

• UL 20276

• DisplayPort v1.1

CONNECTORS

- (1) Mini-DisplayPort 20-pin male (1) DVI-I Dual Link 29-pin female

- Nickel platedMolded PVC boot
- Shielded

CABLE

- 32 AWG connectors
- Shielding: Mylar and aluminum
 Withstanding voltage: 300 V DC
 Insulation resistance: 5 MOhms
- Conductive resistance: 10 Ohms
- Thermal plastic casingLength: 17 cm (6.7 in.)

PACKAGE CONTENTS

• Mini-DisplayPort to DVI Adapter

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

