



KVM Extender

Model
207003

Extend your KVM switch or console up to 450 feet (150 meters) over standard Cat5 cabling.

The INTELLINET NETWORK SOLUTIONS™ KVM Extender includes a pair of units used to extend the reach of your KVM switch or console. One unit is the transmitter and the other is the receiver; both are included in the package and do not need to be ordered separately.

Long-Distance Extension

The KVM Extender can support distances of up 450 feet, or 150 meters, using inexpensive Cat5 network cable. This is very appropriate for the network administrator who may have an office that is at a greater distance from the computer room than the standard KVM cables support.


Flexible Operation

The dual-console operation allows a keyboard and mouse to be attached to a computer locally with another set attached remotely, providing you with the ability to operate the computer from either location; i.e., from the distant office or from within the computer room.

Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all INTELLINET NETWORK SOLUTIONS products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.



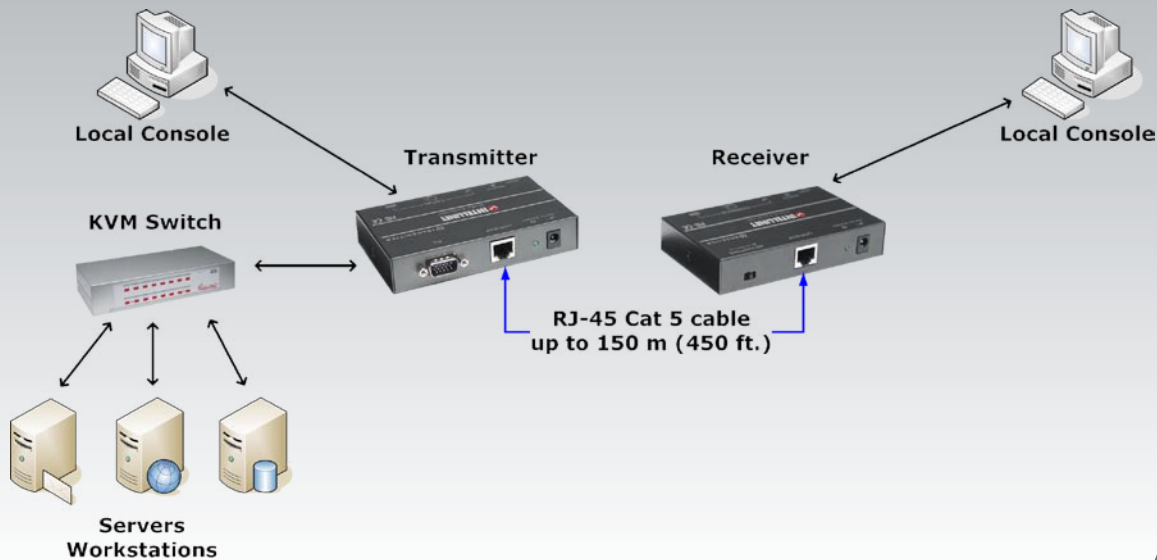

Features

- Extends up to 150 m (450 ft.)
- Uses inexpensive Cat5 RJ-45 cable
- Supports VGA, SVGA and multi-sync monitors
- Supports video resolutions up to 1280 x 1024
- 150 MHz video bandwidth
- Supports horizontal frequencies up to 100 kHz
- Supports vertical frequencies up to 120 Hz
- Supports PS/2 mice and keyboards
- Dual-console operation: Control the computer or KVM Switch locally or remotely
- Computer connection to transmitter unit via 3-in-1 connection cable (included)
- Compatible with all PS/2-equipped computer systems
- Lifetime Warranty

Specifications

GENERAL

- Maximum resolution: 1280 x 1024
- Signal bandwidth: 150 MHz
- Horizontal frequency range: 30 – 100 kHz
- Vertical frequency range: 43 – 120 Hz
- Connection distance: up to 150 m (450 ft.)
- Connectors, transmitter:
 - PC: HD15M (connects to 3-in-1 connection cable)
 - Power supply, 5 V DC
 - Mouse: MD6F (PS/2)
 - Keyboard: MD6F (PS/2)
 - Monitor: HD15F
 - RJ-45 connector
- Connectors, receiver:
 - Power supply, 5 V DC
 - Mouse: MD6F (PS/2)
 - Keyboard: MD6F (PS/2)
 - Monitor: HD15F
 - RJ-45 connector
- Included cable: 3-in-1 cable (HD15M to HD15F/2 x MD6M), 1.8 m (6 ft.)
- Power: external power adapter, 5 V DC, 1000 mA
- Certifications: FCC, CE Mark

ENVIRONMENTAL

- Metal housing
- Dimensions: 125 (W) x 82 (L) x 24 (H) mm (4.9 x 3.3 x 0.9 in.)
- Weight:
 - Transmitter: 275 g (9.7 oz.)
 - Receiver: 260 g (9.2 oz.)

PACKAGE CONTENTS

- KVM Extender transmitter unit
- KVM Extender receiver unit
- Two external power adapters for receiver and transmitter
- 3-in-1 connection cable
- User manual

For more information on INTELLINET NETWORK SOLUTIONS products, consult your local dealer or visit www.intellinet-network.com.



Copyright © INTELLINET NETWORK SOLUTIONS